


SOD-123

**SOD-123 贴片塑封二极管**  
**500mW SOD-123 Fast Switching Diode**



MARKING: T5

**特征 Features**

- 开关速度小于 4.0nS; Fast Switching Device (TRR <4.0 nS)
- 最大功率耗散 500mW; Power Dissipation of 500mW
- 高稳定性和可靠性。High Stability and High Reliability
- 反向漏电流小。Low reverse leakage

**机械数据 Mechanical Data**

- 封装: SOD-123 封装 SOD-123 Small Outline Plastic Package
- 极性: 色环端为负极 Polarity: Color band denotes cathode end
- 环氧树脂 UL 易燃等级 Epoxy UL: 94V-0
- 安装位置: 任意 Mounting Position: Any

极限值和温度特性(TA = 25℃ 除非另有规定)

**Maximum Ratings & Thermal Characteristics** (Ratings at 25℃ ambient temperature unless otherwise specified.)





参数 Parameters	符号 Symbol	数值 Value	单位 Unit
反向电压 Reverse Voltage	VR	75	V
反向峰值电压 Peak Reverse Voltage	VRM	100	V
功率消耗 Power Dissipation	Pd	500	mW
工作结温 Operating junction temperature	Tj	150	℃
存储温度 Storage temperature range	Ts	-55-+150	℃
反向工作电压 Working Inverse Voltage	WIV	75	V
平均整流电流 Average Rectified Current	Io	200	mA
正向(不重复)电流 Non-repetitive Peak Forward Current	IFM	500	mA
正向(不重复)浪涌电流 Peak Forward Surge Current	IFSM	2.0	A

@tp=1us; TA=25℃


Valid provided that electrodes are kept at ambient temperature.

**电特性 Electrical Characteristics** (Ratings at 25℃ ambient temperature unless otherwise specified).

符号 Symbols	参数 Parameter	测试条件 Test Condition	界限 Limits		单位 Unit
			Min	Max	
BV	反向击穿电压	IR=100uA	100	---	V
	Breakdown Voltage	IR=5uA	75		
IR	反向漏电流	VR=20V	---	25	nA
	Reverse Leakage Current	VR=75	---	2.5	uA
VF	正向电压 Forward Voltage	IF=5mA	0.62	0.72	V
		IF=10mA	---	0.855	
		IF=100mA	---	1.0	
		IF=150mA	---	1.25	
TRR	反向恢复时间	IF= 10mA, IR=10mA	---	4	nS
	Reverse Recovery Time	RL=100Ω			
		IRR=0.1mA			
C	结电容	VR=0V, f=1MHZ	---	4	pF
	Capacitance				

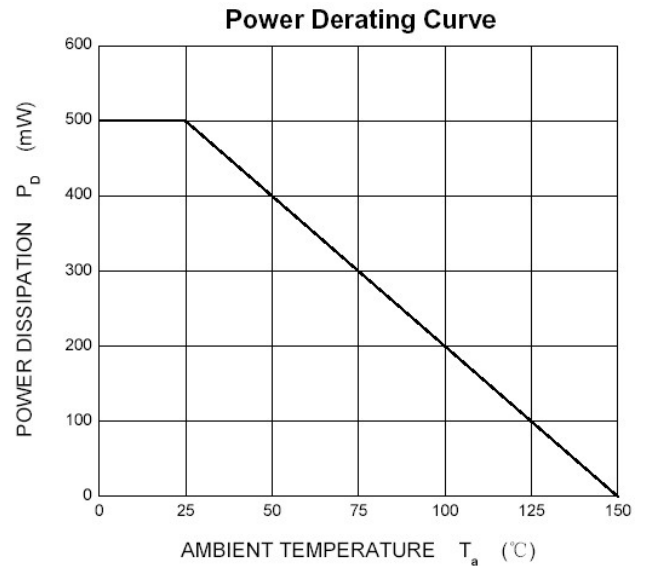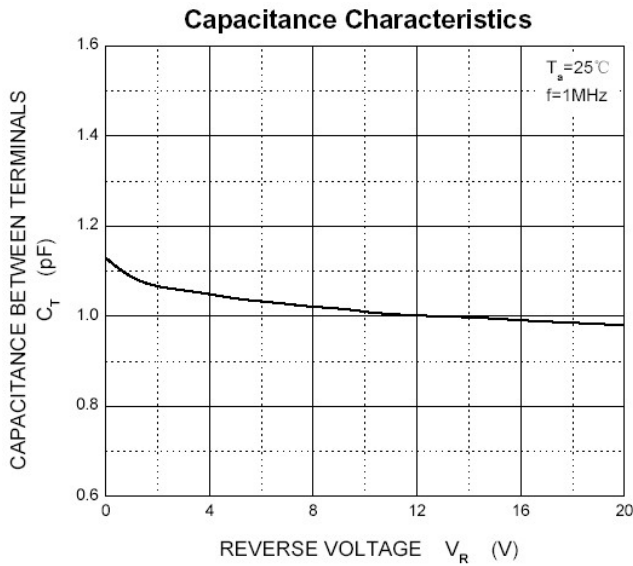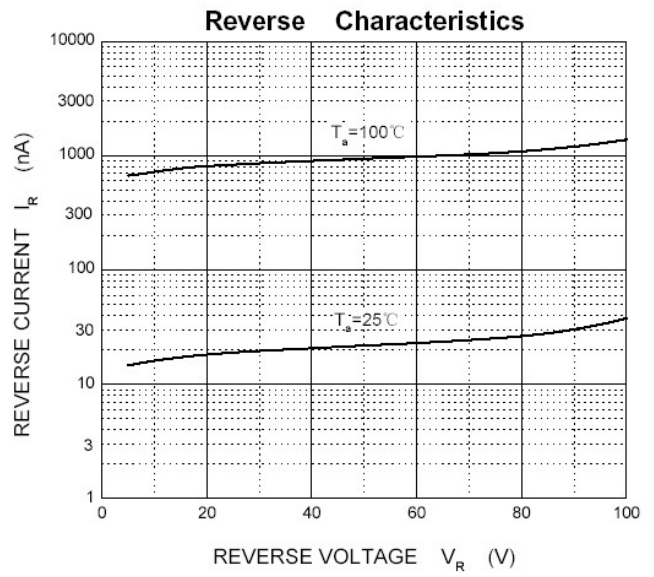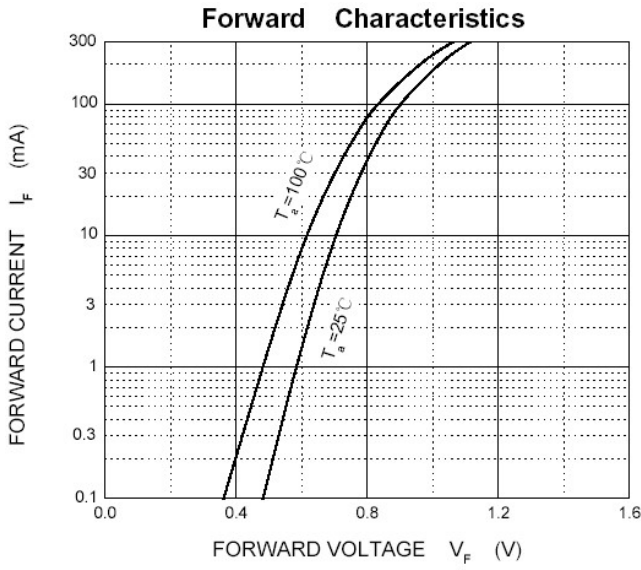

**SOD-123 PACKAGE OUTLINE** Plastic surface mounted package

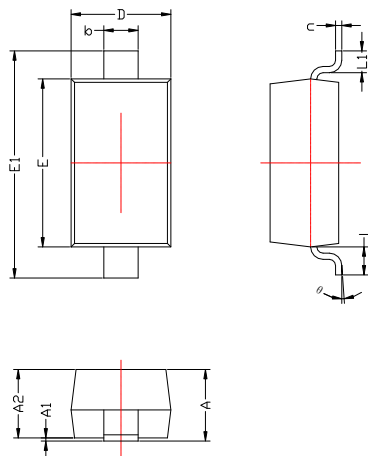

SYMBOL	DIMENSIONS	
	MIN.	MAX.
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.450	0.650
c	0.080	0.150
D	1.500	1.700
E	2.600	2.800
E1	3.550	3.850
L	0.500REF	
L1	0.250	0.450
$\theta$	0°	8°