

1-Line Unidirectional ESD Protection Diode


Description

Unidirectional ElectroStatic Discharge (ESD) protection diode in a SOD523 plastic package designed to protect one transmission or data line from the damage caused by ESD and other transients.

Features

- Unidirectional ESD protection of one line
- Reverse stand-off voltage: 3.3V Max
- Low leakage current: nA Level
- Response time is typically < 1 ns
- Low clamping voltage: $V_C < 14.1 \text{ V @ } I_{PP} = 11.2\text{A}$
- ESD Protection: 15kV(air)/ 8kV(contact)
(IEC61000-4-2)
- Surge Protection: 11.2A (IEC 61000-4-5 8/20 μs)

Schematic and Pin Configuration




Graphic symbol

Applications

- Cellular phones
- Portable devices
- Digital cameras
- Power supplies

Marking Information



ZE= Device Marking Code

Ordering nformation

Part Number	Packaging	Package
PESDU3301D5N	3000/Tape & Reel	SOD523


Absolute Maximum Ratings ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P_{PK}	158	W
Peak Pulse Current (8/20 μs)	I_{PP}	11.2	A
ESD per IEC 61000-4-2 (Air)	V_{ESD}	± 15	kV
ESD per IEC 61000-4-2 (Contact)		± 8	
Operating Temperature Range	T_{OP}	-55 to +125	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 to +150	$^{\circ}\text{C}$


Electrical Characteristics ($T_A=25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Working Voltage	V_{RWM}			3.3	V	Any I/O pin to ground
Breakdown Voltage	V_{BR}	5.0			V	$I_T = 1\text{mA}$, any I/O pin to ground
Reverse Leakage Current	I_R			100	nA	$V_{RWM} = 3.3\text{V}$, any I/O pin to ground
Clamping Voltage	V_C			14.1	V	$I_{PP} = 11.2\text{A}$ (8/20 μs pulse)
Junction Capacitance	C_J			105	pF	$V_R = 0\text{V}$, $f = 1\text{MHz}$


Typical Performance Characteristics (T_A=25°C unless otherwise Specified)

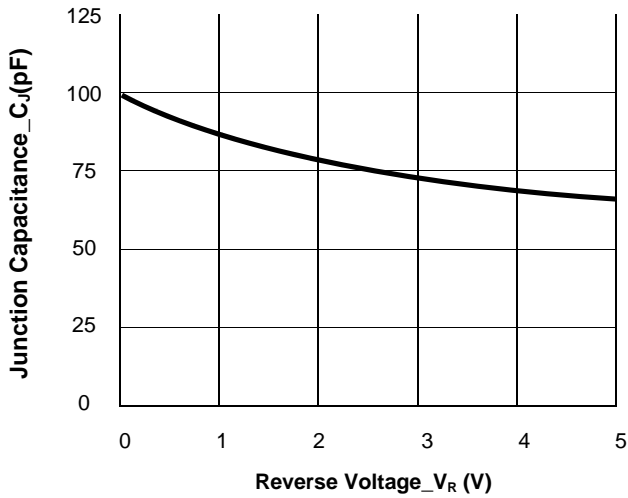


Junction Capacitance vs. Reverse Voltage

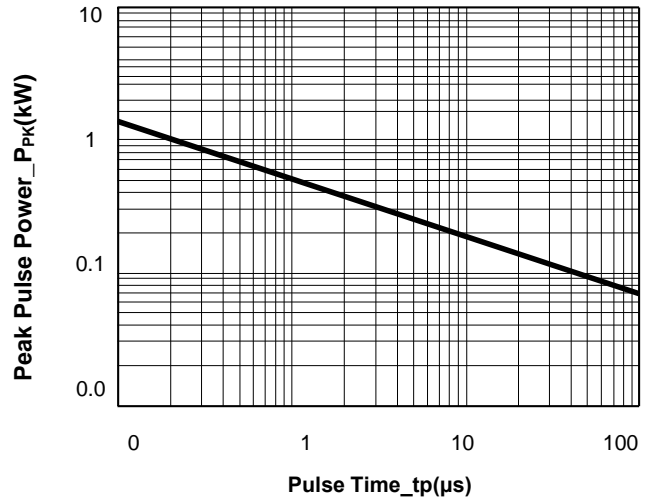


Peak Pulse Power vs. Pulse Time

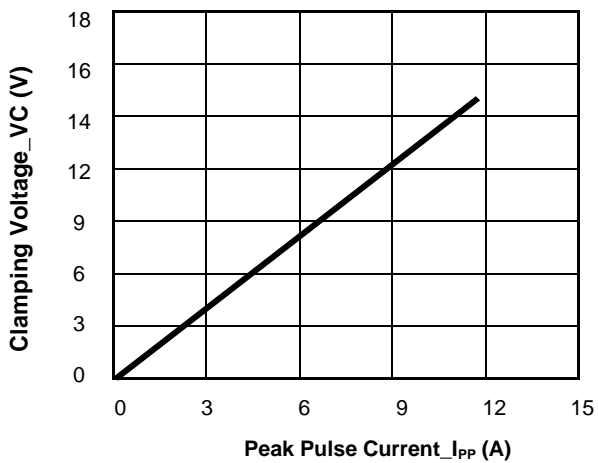

Clamping Voltage vs. Peak Pulse Current

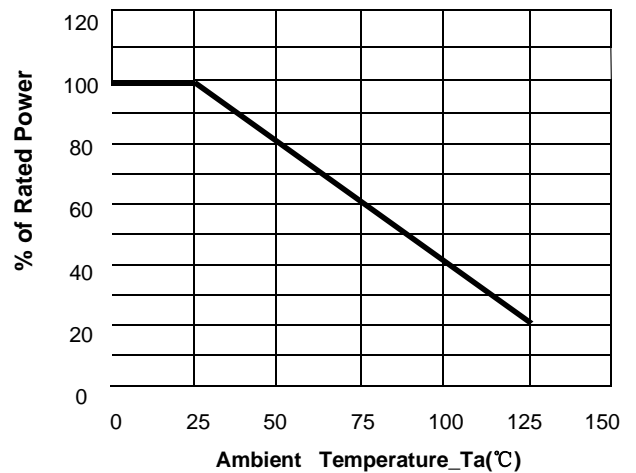


Power Derating Curve

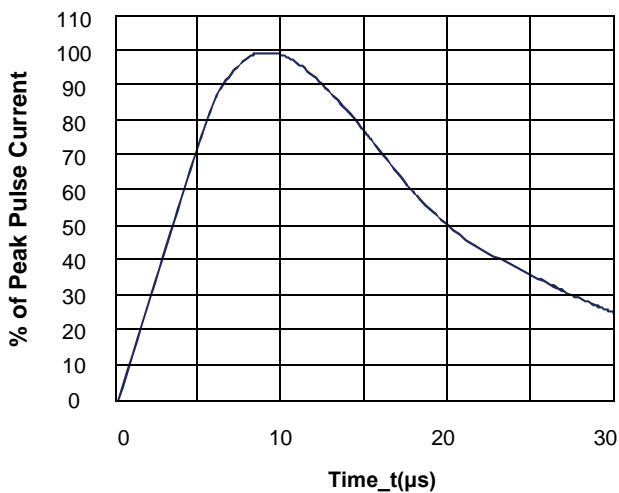


8/20μs Pulse Waveform

SOD523 Package Outline Drawing

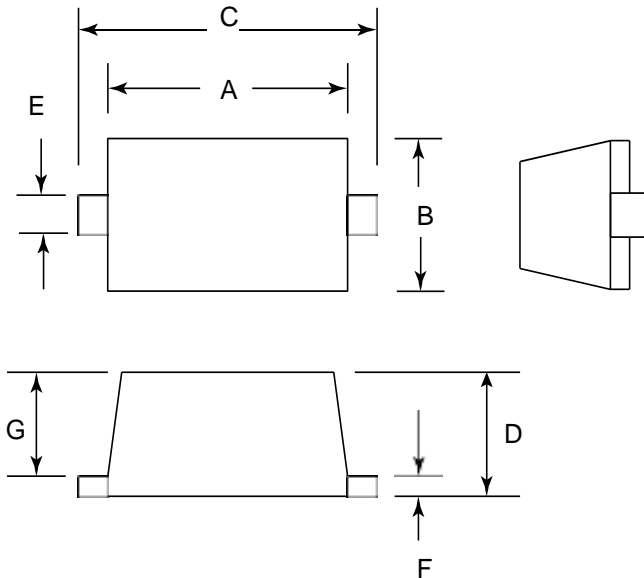

SYM	DIMENSIONS			
	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.10	1.30	0.043	0.051
B	0.70	0.90	0.028	0.035
C	1.50	1.70	0.059	0.067
D	0.50	0.70	0.020	0.028
E	0.25	0.35	0.010	0.014
F	0.10	0.20	0.004	0.008
G	0.50	0.70	0.020	0.028

Suggested Land Pattern

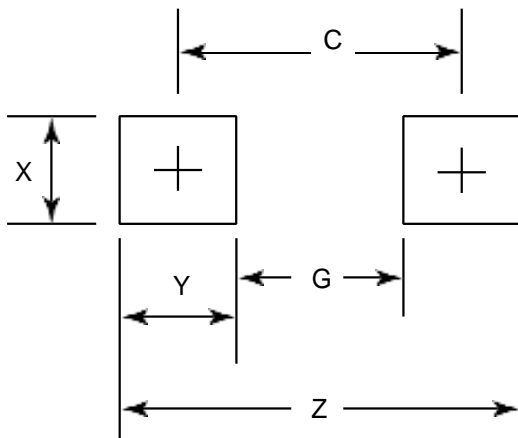

SYM	DIMENSIONS	
	MILLIMETERS	INCHES
C	1.70	0.067
G	1.10	0.043
X	0.80	0.031
Y	0.60	0.024
Z	2.30	0.091