

Surface Mount Super Fast Rectifier

FEATURES

- For surface mounted applications
- Low profile package
- Built-in strain relief
- Easy pick and place
- Superfast recovery times for high efficiency
- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- Glass passivated junction
- High temperature soldering: 260 °C/10 seconds at terminals

MECHANICAL DATA


Case: JEDEC DO-214AA molded plastic

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Indicated by cathode band

Standard packaging: 12mm tape (EIA-481)

Weight: 0.003 ounce, 0.093 gram

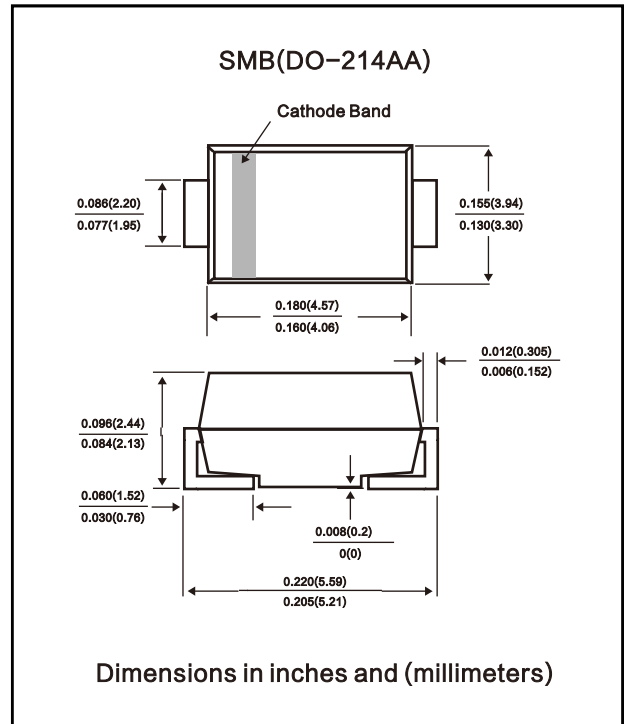


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Characteristic	Symbol	ER2A	ER2B	ER2C	ER2D	ER2E	ER2G	ER2J	Unit
Peak Repetitive Reverse Voltage	V_{RRM}								
Working Peak Reverse Voltage	V_{RWM}	50	100	150	200	300	400	600	V
DC Blocking Voltage	V_R								
RMS Reverse Voltage	$V_{R(RMS)}$	35	70	105	140	210	280	420	V
Average Rectified Output Current @ $T_L = 110^\circ C$	I_o	2.0							A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50							A
Forward Voltage @ $I_F = 2.0A$	V_{FM}	0.95			1.25		1.7		V
Peak Reverse Current @ $T_A = 25^\circ C$	I_{RM}	5.0							μA
At Rated DC Blocking Voltage @ $T_A = 100^\circ C$		500							
Reverse Recovery Time (Note 1)	t_{rr}	35							nS
Typical Junction Capacitance (Note 2)	C_j	25							pF
Typical Thermal Resistance (Note 3)	$R_{\theta JL}$	20							K/W
Operating and Storage Temperature Range	T_j, T_{STG}	-65 to +150							$^\circ C$

Note: 1. Measured with $I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A,$
 2. Measured at 1.0 MHz and applied reverse voltage of 4.0 V DC.
 3. Mounted on P.C. Board with 8.0mm² land area.

Surface Mount Super Fast Rectifier

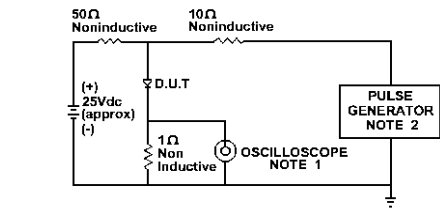

NOTE: 1. Rise Time = 7ns max.
 Input Impedance = 1 megohm 22pF
 2. Rise Time = 10ns max.
 Source Impedance = 50 Ohms

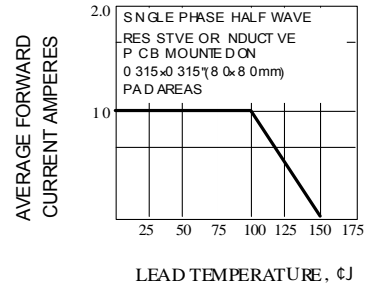



Fig. 1 REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

Fig. 2 MAXIMUM AVERAGE FORWARD CURRENT RATING

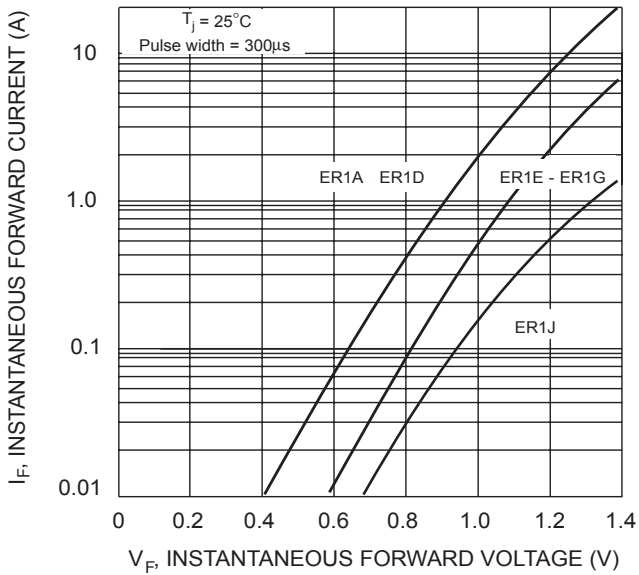


Fig.3 Typical Forward Characteristics

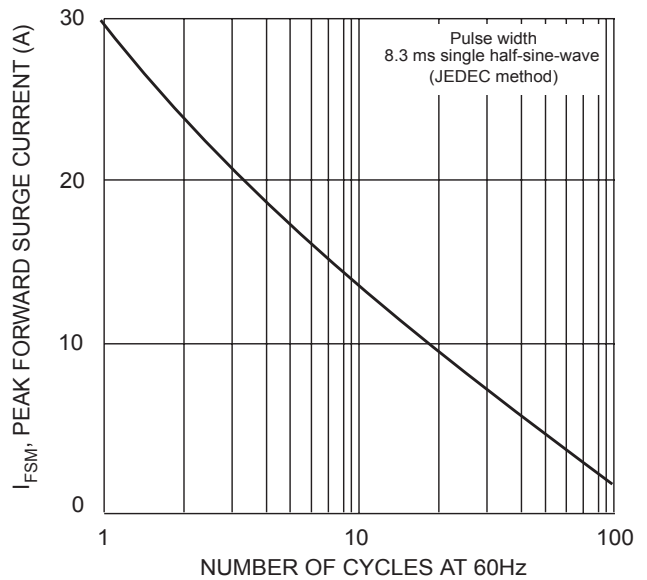


Fig.4 PEAK FORWARD SURGE CURRENT

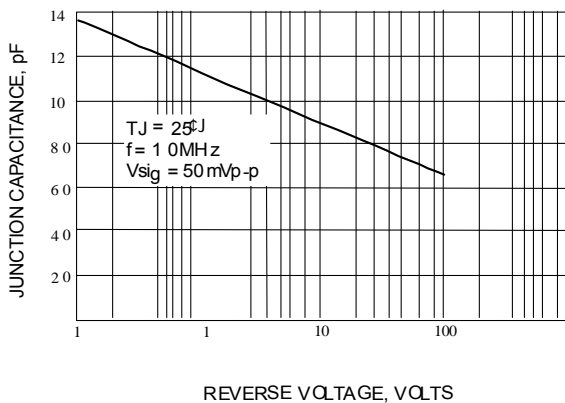


Fig. 5-TYPICAL JUNCTION CAPACITANCE