

1-Line Uni-directional TVS Diode


Description

The PESDU2071P6 is an uni-directional TVS diode, utilizing leading monolithic silicon technology to provide fast response time and low ESD clamping voltage, making this device an ideal solution for protecting voltage sensitive data and power line. The PESDU2071P6 complies with the IEC 61000-4-2 (ESD) with $\pm 30\text{kV}$ air and $\pm 30\text{kV}$ contact discharge. It is assembled into an ultra-small 1.6x1.0x0.5mm lead-free DFN package. The small size and high ESD surge protection make PESDU2071P6 an ideal choice to protect cell phone, digital cameras, audio players and many other portable applications.

Features

- Ultra small package: 1.6x1.0x0.5mm
- Protects one data or power line
- Working Voltage: 12V
- Low clamping voltage
- 2-pin leadless package
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
Air discharge: $\pm 30\text{kV}$
Contact discharge: $\pm 30\text{kV}$
 - IEC 61000-4-5 (Lightning) 50A (8/20 μs)
- RoHS Compliant

Dimensions and Pin Configuration

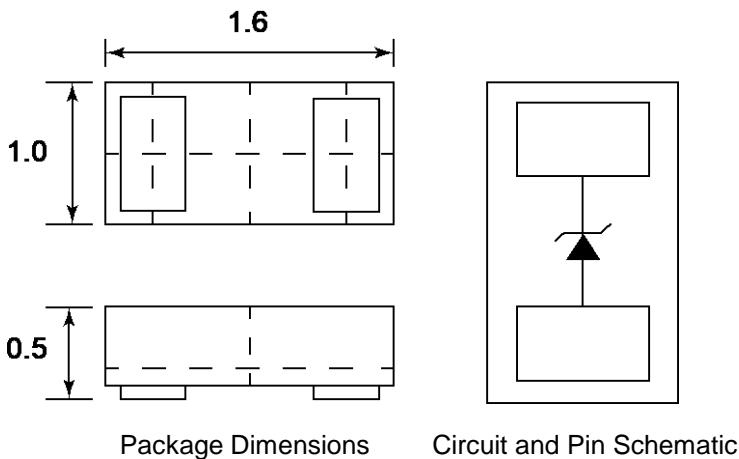


Mechanical Characteristics

- Package: DFN1610-2
- Case Material: “Green” Molding Compound.
- Moisture Sensitivity: Level 1 per J-STD-020
- Marking Information: See Below

Applications

- Mobile Phones and Accessories
- Battery Protection
- USB Power line
- Power Line Protection
- Hand Held Portable Applications

Marking Information

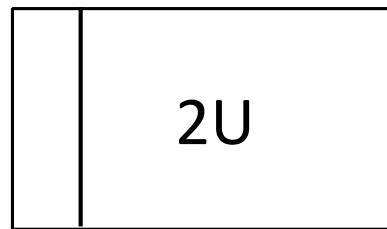

2U = Device Marking Code
Bar denotes cathode

Ordering Information

| Part Number | Shipping | Reel Size |
|-------------|------------------|-----------|
| PESDU2071P6 | 3000/Tape & Reel | 7 inch |


Absolute Maximum Ratings (T_A=25°C unless otherwise specified)

| Parameter | Symbol | Value | Unit |
|---------------------------------|------------------|------------|------|
| Peak Pulse Power (8/20μs) | P _{PK} | 1800 | W |
| Peak Pulse Current (8/20μs) | I _{PP} | 50 | A |
| ESD per IEC 61000-4-2 (Air) | V _{ESD} | ±30 | kV |
| ESD per IEC 61000-4-2 (Contact) | | ±30 | |
| Lead temperature | T _L | 260 | °C |
| Operating Temperature Range | T _{OP} | -40 ~ +85 | °C |
| Storage Temperature Range | T _{STG} | -55 ~ +150 | °C |

Electrical Characteristics (T_A=25°C unless otherwise specified)


| Parameter | Symbol | Min | Typ | Max | Unit | Test Condition |
|-------------------------|------------------|-----|-----|-----|------|--------------------------------------|
| Reverse Working Voltage | V _{RWM} | | | 20 | V | |
| Breakdown Voltage | V _{BR} | 23 | | | V | I _T = 1mA |
| Reverse Leakage Current | I _R | | | 1 | μA | V _{RWM} = 20V |
| Clamping Voltage | V _C | | | 28 | V | I _{PP} = 10A (8/20μs pulse) |
| Clamping Voltage | V _C | | | 36 | V | I _{PP} = 50A (8/20μs pulse) |
| Junction Capacitance | C _J | | 300 | | pF | V _R = 0V, f = 1MHz |

Electrical characteristics ($T_A = 25^\circ\text{C}$, unless otherwise noted)

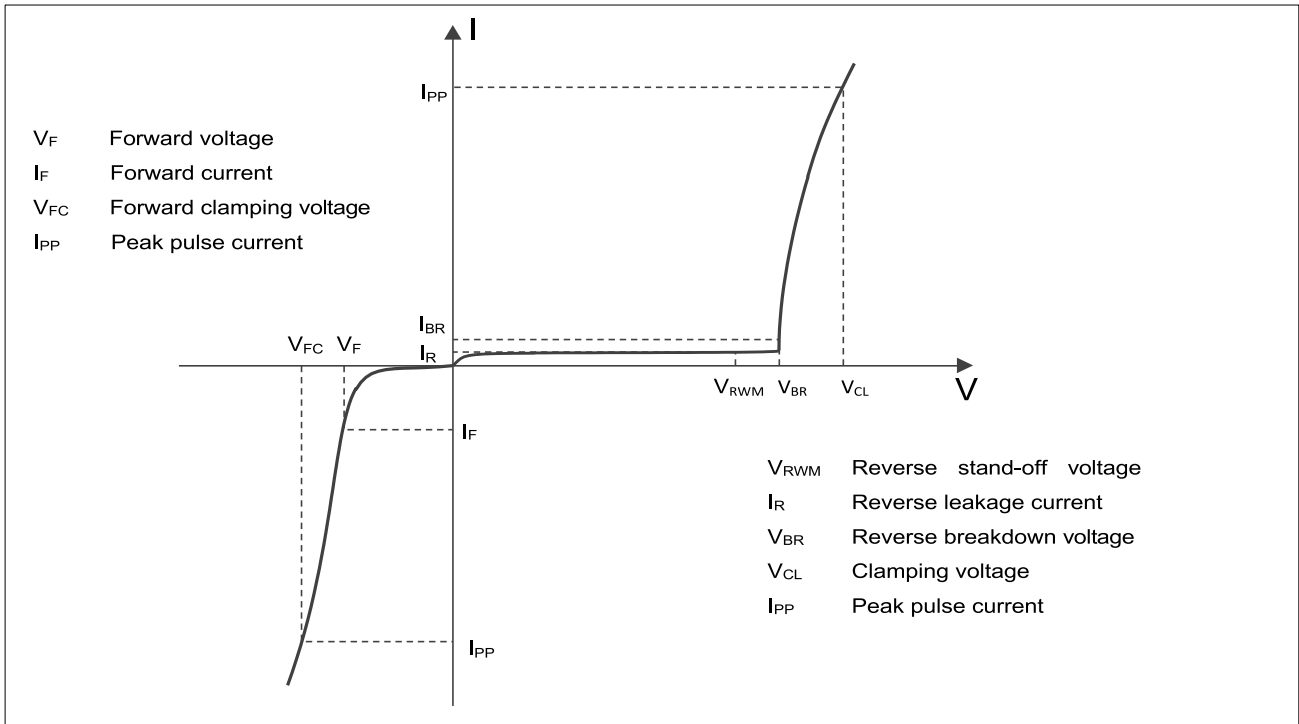


Definitions of electrical characteristics


Typical Performance Characteristics (T_A=25°C unless otherwise Specified)

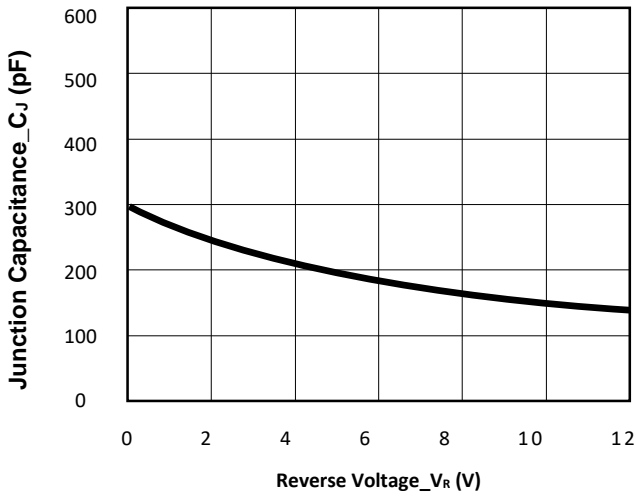


Junction Capacitance vs. Reverse Voltage

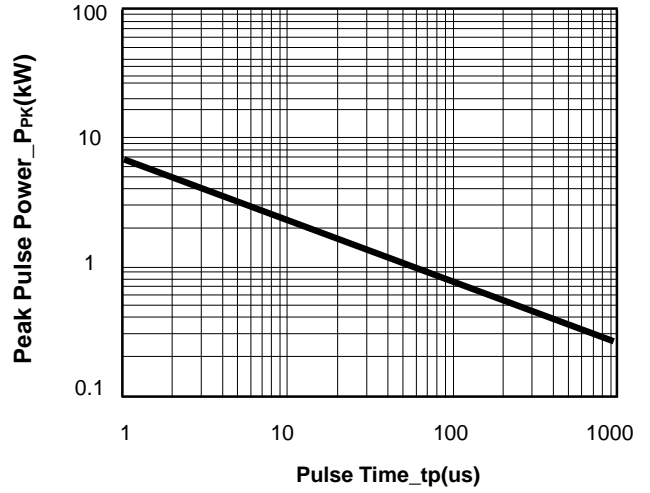


Peak Pulse Power vs. Pulse Time

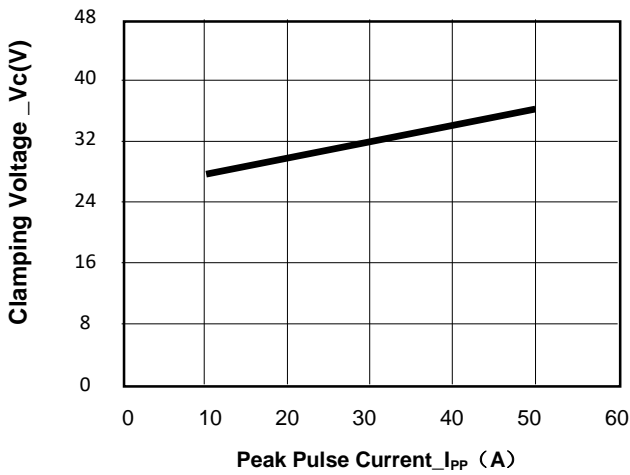

Clamping Voltage vs. Peak Pulse Current

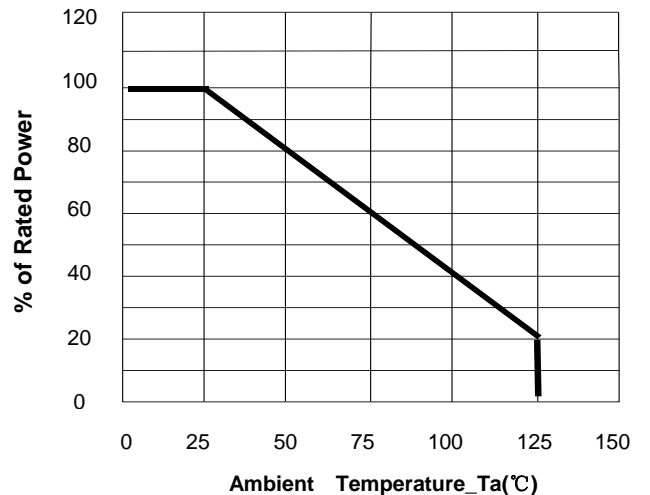


Power Derating Curve

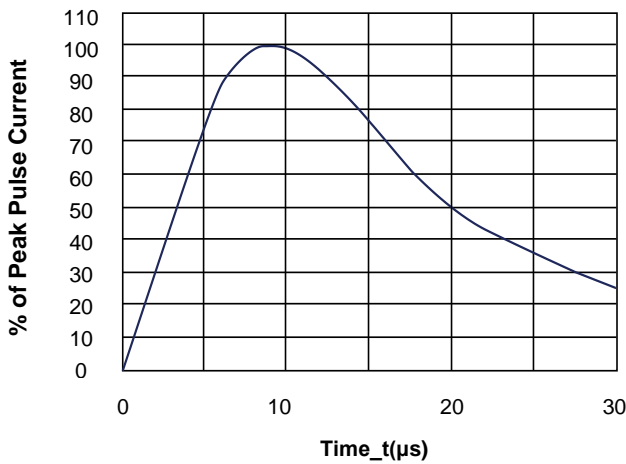


8/20μs Pulse Waveform

DFN1610-2 Package Outline Drawing

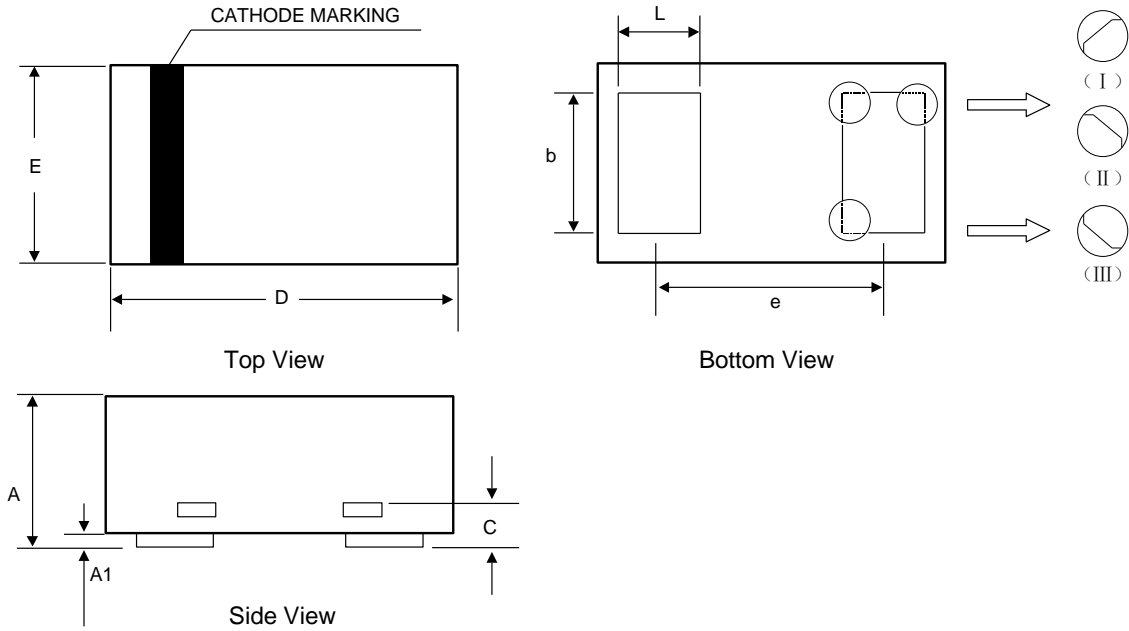

| SYM | DIMENSIONS | | | | | |
|-----|-------------|------|------|-----------|-------|-------|
| | MILLIMETERS | | | INCHES | | |
| | MIN | NOM | MAX | MIN | NOM | MAX |
| A | 0.45 | 0.50 | 0.55 | 0.018 | 0.020 | 0.022 |
| A1 | | 0.02 | 0.05 | | 0.001 | 0.002 |
| b | 0.75 | 0.80 | 0.85 | 0.030 | 0.032 | 0.034 |
| c | 0.10 | 0.15 | 0.20 | 0.004 | 0.006 | 0.008 |
| D | 1.55 | 1.60 | 1.65 | 0.062 | 0.064 | 0.066 |
| e | 1.10 BSC | | | 0.044 BSC | | |
| E | 0.95 | 1.00 | 1.05 | 0.038 | 0.040 | 0.042 |
| L | 0.35 | 0.40 | 0.45 | 0.014 | 0.016 | 0.018 |


Suggested Land Pattern

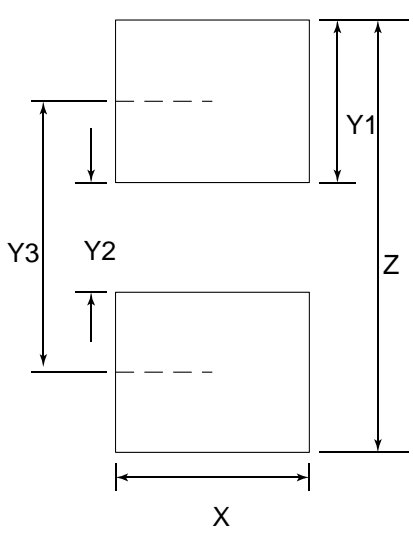



| SYM | DIMENSIONS | |
|-----|-------------|--------|
| | MILLIMETERS | INCHES |
| X | 1.00 | 0.040 |
| Y1 | 0.62 | 0.025 |
| Y2 | 0.60 | 0.024 |
| Y3 | 1.22 | 0.049 |
| Z | 1.85 | 0.074 |

TAPE AND REEL INFORMATION

Reel Dimensions

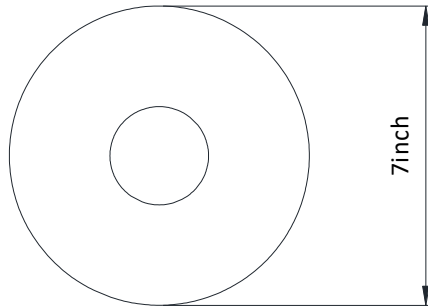

Tape Dimensions

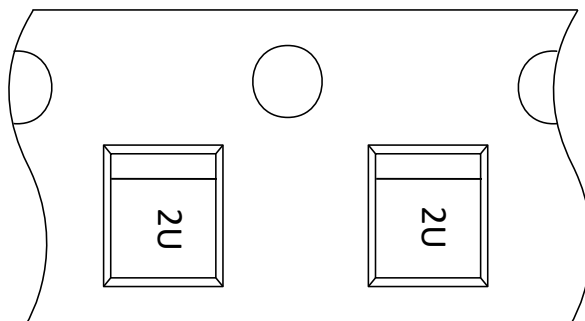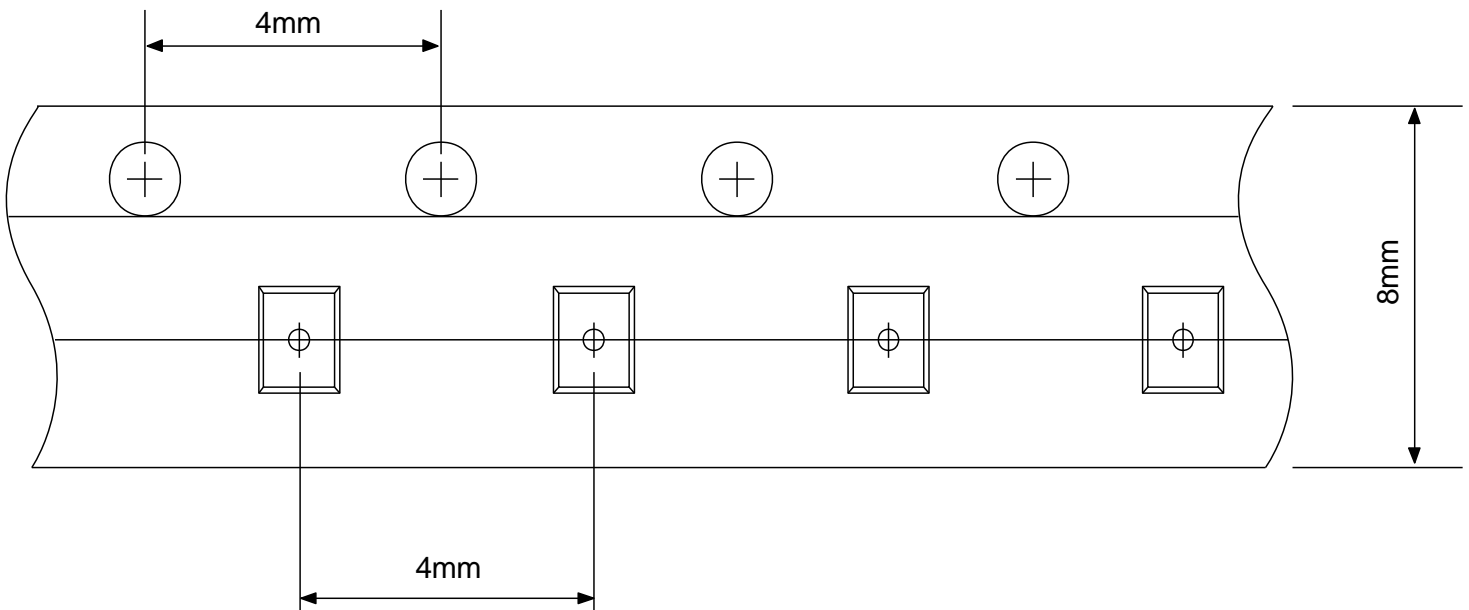

User Direction of Feed

IMPORTANT NOTICE

The information given in this document is believed to be accurate and reliable but shall in no event be regarded as a guarantee of conditions or characteristics. PN-Silicon assumes no responsibility for any errors in this document, or for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of PN-Silicon.

The product listed in this document are designed to be used with ordinary electronic equipment or devices and are not authorized to used with equipment or devices which require an extremely high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, aerospace machinery, nuclear-reactor controllers, automotive and other safety device.)

The **PN SILICON** logo is a registered trademark of PN-Silicon co., ltd which reserves the right to make changes to the product or this document at any time without notice. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. PN-Silicon makes no warranty, representation or guarantee, express or implied, regarding the suitability of its products for any particular purpose. All rights reserved.